

BHP2A0[BAP2A0]




"D"和"d"油口有螺纹加工, 用O形圈密封, 旁侧削平的SAE J1926/1 (ISO J1926-1)。

"D" and "d" ports are machined in compliance with threaded port with O-ring seal in truncated housing SAE J1926/1(ISO J1926-1).



安装法兰材料 Mounting flange material	V
Aluminum	Screws tightening torque Nm 40...45
Cast iron	70...75

出油口
OUTLET

进油口
INLET

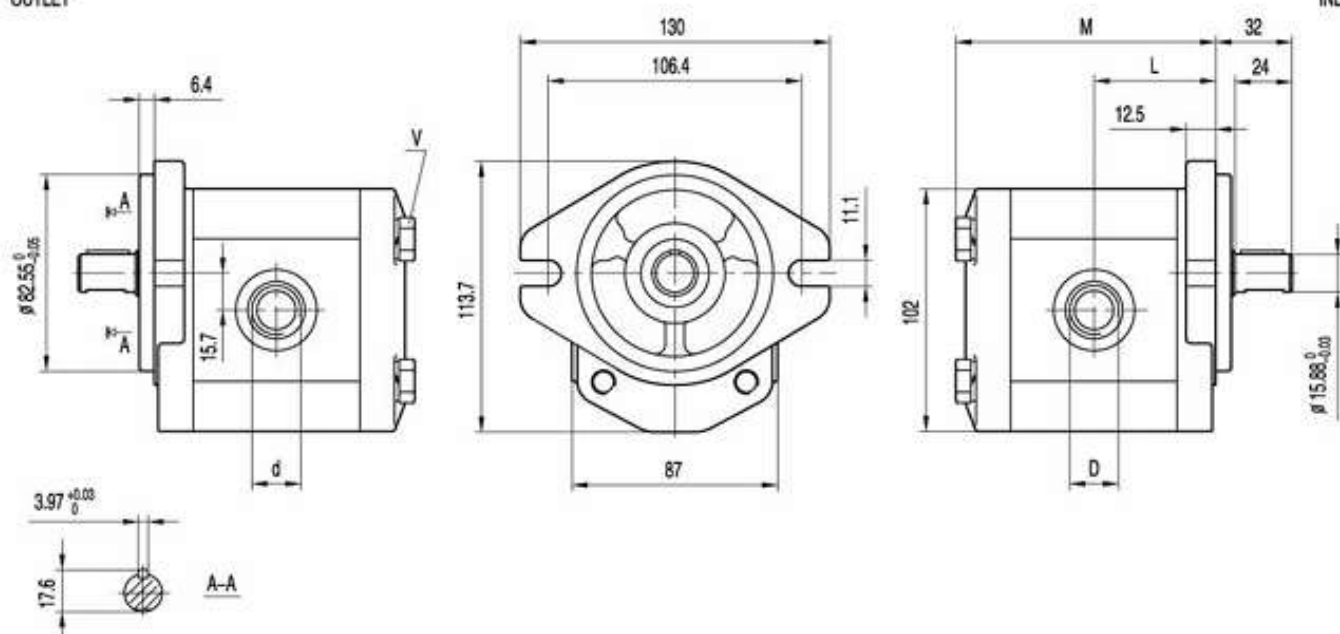


规格 Type	排量 Displacement (cm³/rev)	最大压力 Max pressure			最高转速 Max. speed (r/min)	最低转速 Min. speed (r/min)	尺寸 Dimensions			
		P1	P2	P3			M	L	D	d
		bar	bar	bar			mm	mm		
BHP2A0-D-3	3	270	285	300	4000	800	91.1	43.6	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-4	4	270	285	300	4000	600	92.7	44.4	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-6	6	270	285	300	4000	600	96	46	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-8	8	270	285	300	3500	500	99.3	47.7	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-10	10	270	285	300	3000	500	102.6	49.3	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-12	12	270	285	300	3000	500	105.9	51	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-14	14	250	265	280	4000	500	109.3	52.7	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-16	16	250	265	280	4000	500	112.7	54.4	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-18	18	250	265	280	3600	400	116	56	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-20	20	220	235	250	3200	400	119.3	57.7	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-22	22	220	235	250	3000	400	122.6	59.3	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-25	25	200	215	230	3000	400	127.6	61.8	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-28	28	180	190	200	2500	400	132.6	64.3	1 1/16-12UNF	7/8-14UNF
BHP2A0-D-30	30	160	170	180	2500	400	135.9	66	1 5/16-12UNF	7/8-14UNF

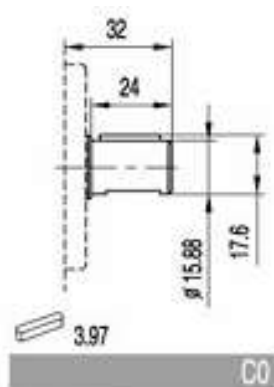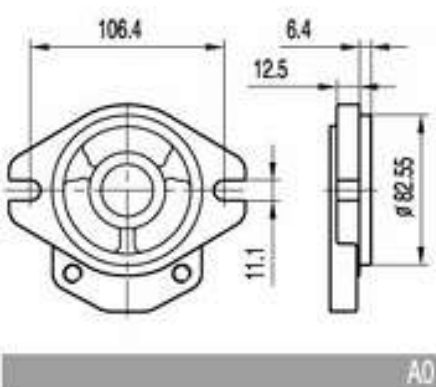


最大扭矩
Max.Torque 140 Nm




最大扭矩
Max.Torque 160 Nm

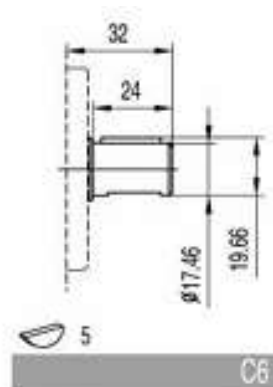


最大扭矩
Max.Torque 180 Nm

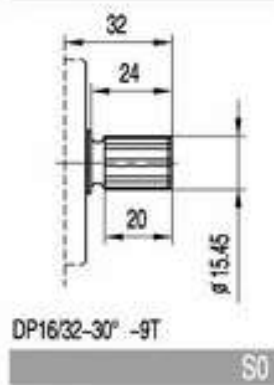


最大扭矩
Max.Torque 185 Nm

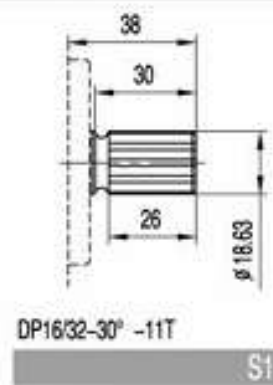

最大扭矩
Max.Torque 200 Nm

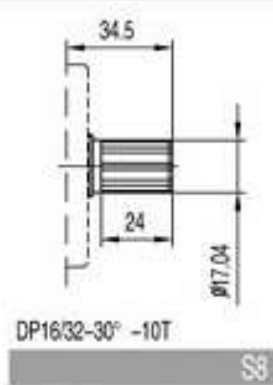

最大扭矩
Max.Torque 190 Nm



L0/L1/L3/L4

规格 TYPE	油口代号 PORTS CODE	进油口 INLET	出油口 OUTLET
		A	a
BA(H)P2...3 ÷ BA(H)P2...6	L0	G1/2	G1/2
BA(H)P2...8 ÷ BA(H)P2...30	L1	G3/4	G1/2
BA(H)P2...16 ÷ BA(H)P2...30	L3	G 1	G3/4
BA(H)P2...8 ÷ BA(H)P2...30	L4	G3/4	G3/4