

BHP3 [BHM3]

如何订购/ HOW TO ORDER

BH	P	3	前盖 Front cover	旋向 Rotation	规格 Size	轴伸 Shaft	油口 Ports	油口位置 Ports position	油封 Seals	可选项 Options
系列号 Series	P- 齿轮泵 Pump M- 齿轮马达 Motor	组别 Group	B0 B1 A0 A1	D 顺时针转 Clockwise S 逆时针转 Counter clockwise R 可正反转 Reversible	20 22 26 33 39 46 50 52 55 63 71					
可选项/ Options										
排油管/ Drain										
Q0-内部排油 /internal drain										
Q1-外部排油 /external drain G3/8										
Q2-外部排油 / external drain 3/4-16 UNF										
Q3-外部排油 / external drain G1/4										
Q4-外部排油 / external drain 9/16-18 UNF										

油口位置	Ports position
省略-侧进侧出	Omit-Side inlet and side outlet
A-前进前出	A-Front inlet and front outlet
B-后进前出	B-Back inlet and front outlet
C-后进侧出	C-Back inlet and side outlet
D-侧进前出	D-Side inlet and front outlet
R-后进后出	R-Back inlet and back outlet

油封	Seals
省略-温度范围在-10℃~+80℃,进油口最高绝对压力为3bar。	Omit-Range between -10℃ and +80℃,inlet pressure up to max. 3 bar absolute.
V-适用于高温介质,温度范围在-10℃~+120℃。	V-Version suitable for fluid at hi-temperatures, range between -10℃ and +120℃.
H-适用于低温介质,温度范围在-40℃~+80℃。	H-Version suitable for fluid at low-temperatures, range between -40℃ and +80℃.
T-适用于进油口最大绝对压力3~6bar。	T-Version suitable for inlet pressure up to max. 3 and 6 bar absolute.
N-适用于进油口最大绝对压力3~10bar。	N-Version suitable for inlet pressure up to max. 3 and 10 bar absolute.

范例/ Examples:

BHP3-B0-D-20-C0-F0 =	顺时针转, 排量 20 cc/rev, B0 前盖, C0 圆柱轴伸, F0 安装油口, 标准油封 clockwise rotation, 20 cc/rev, B0 front cover, C0 parallel shaft, setting ports F0 type, standard seals
BHP3-B1-D-20-T0-E0 =	顺时针转, 排量 20 cc/rev, B1 前盖, T0 1:8锥形轴伸, E0 安装油口, 标准油封 clockwise rotation, 20 cc/rev, B1 front cover, 1:8 tapered shaft(T0), setting ports E0 type, standard seals
BHP3-A0-D-20-C2-F4-N=	顺时针转, 排量 20 cc/rev, A0 前盖, C2 圆柱轴伸, F4 安装油口,高压油封(N) clockwise rotation, 20 cc/rev, A0 front cover, C2 parallel shaft, setting ports F4 type, high pressure seals(N)

BHP3B1




M10 螺纹深 18,
安装泵时, n.8 M10 螺钉扭矩设定为
47 ± 3 Nm.
轴伸 M14x1.5 螺母扭矩设定为 80 Nm.

M10 thread depth 18,
To mount the pump, n.8 M10 screws,
with a torque wrench setting fixed
at 47 ± 3 Nm.
Shaft M14x1.5 nut, with a torque
wrench setting fixed at 80 Nm.

出油口
OUTLET

进油口
INLET

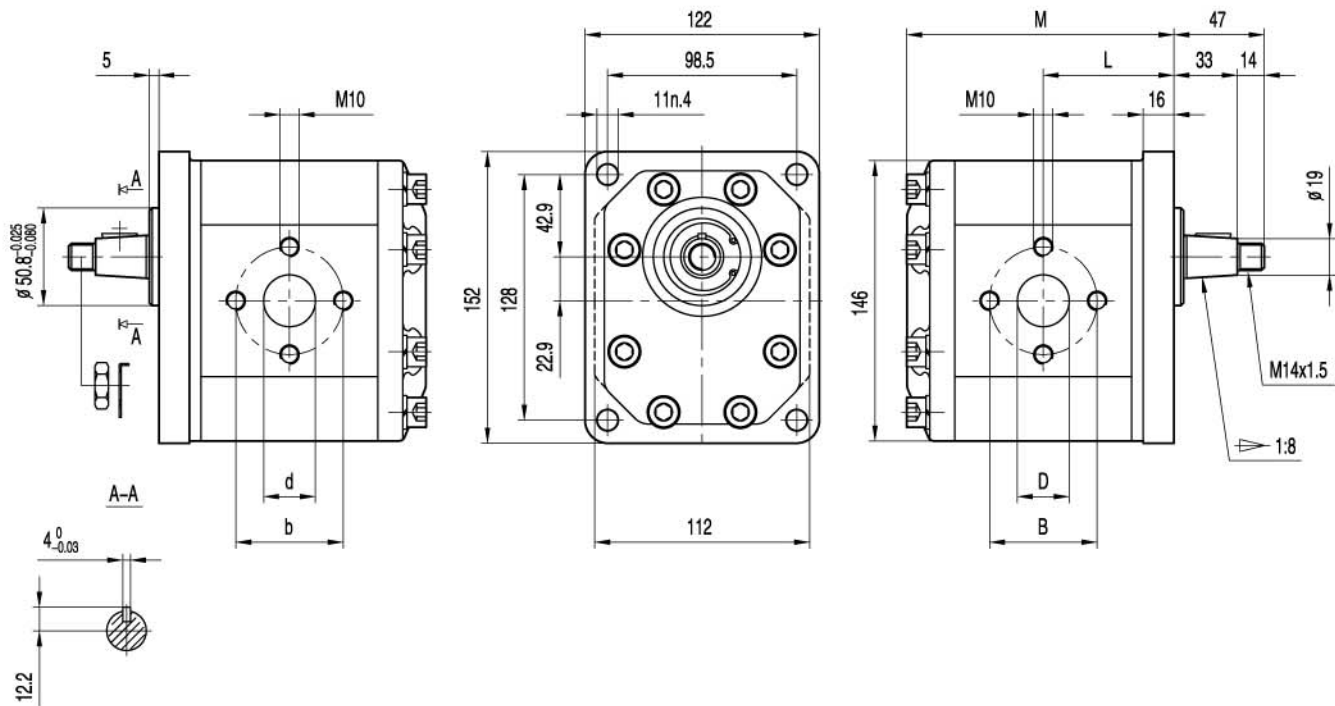

规格 Type	排量 Displacement	最大压力 Max pressure			最高转速 Max. speed	最低转速 Min. speed	尺寸 Dimensions					
		P1	P2	P3			M	L	B	D	b	d
	(cm ³ /rev)	bar	bar	bar	(r/min)	(r/min)	mm	mm	mm	mm	mm	mm
BHP3B1-D-20	20	250	265	280	3500	600	128	63	56	27	56	19
BHP3B1-D-22	22	250	265	280	3500	600	130	64	56	27	56	19
BHP3B1-D-26	26	250	265	280	3000	600	133	65	56	27	56	19
BHP3B1-D-33	33	230	250	270	3000	500	139	68	56	27	56	19
BHP3B1-D-39	39	230	250	270	3000	500	146	72	56	27	56	19
BHP3B1-D-46	46	230	250	270	3000	500	152	75	51	27	51	27
BHP3B1-D-50	50	220	240	260	3000	500	156	77	56	27	56	27
BHP3B1-D-52	52	220	240	260	3000	500	158	78	56	27	56	27
BHP3B1-D-55	55	200	230	250	2800	400	160	79	62	33	51	27
BHP3B1-D-63	63	200	230	250	2800	400	168	83	62	33	51	27
BHP3B1-D-71	71	180	200	220	2500	400	175	86	62	33	51	27