

BKP1

如何订购/ HOW TO ORDER

BK	P	1	前盖 Front cover	旋向 Rotation	规格 Size	轴伸 Shaft	油口 Ports	油口位置 Ports position	油封 Seals	可选项 Options
系列号 Series	P- 齿轮泵 Pump	组别 Group	Q0	D 顺时针转 Clockwise	0.8					
			Q1	S 逆时针转 Counter clockwise	1.1					
			Q2	R 可正反转 Reversible	1.3					
			B0		1.6					
					1.8					
					2.1					
					2.7					
					3.2					
					3.7					
					4.2					
					4.8					
					5.8					
					7.0					
					8.0					

油口位置	Ports position
省略-侧进侧出	Omit-Side inlet and side outlet
A-前进前出	A-Front inlet and front outlet
B-后进前出	B-Back inlet and front outlet
C-后进侧出	C-Back inlet and side outlet
D-侧进前出	D-Side inlet and front outlet
R-后进后出	R-Back inlet and back outlet

油封	Seals
省略-温度范围在-10℃~+80℃,进油口最高绝对压力为3bar。	Omit-Range between -10℃ and +80℃,inlet pressure up to max. 3 bar absolute.
V-适用于高温介质, 温度范围在-10℃~+120℃。	V-Version suitable for fluid at hi-temperatures, range between -10℃ and +120℃.
H-适用于低温介质, 温度范围在-40℃~+80℃。	H-Version suitable for fluid at low-temperatures, range between -40℃ and +80℃.
T-适用于进油口最大绝对压力3~6bar。	T-Version suitable for inlet pressure up to max. 3 and 6 bar absolute.
N-适用于进油口最大绝对压力3~10bar。	N-Version suitable for inlet pressure up to max. 3 and 10 bar absolute.

范例/ Examples:

BKP1-Q0-D-0.8-G0-L1-B=	顺时针转, 排量 0.8 cc/rev, Q0 前盖, G0 扁键轴伸, L1 安装油口, 后进前出, 标准油封
	clockwise rotation, 0.8 cc/rev, Q0 front cover, G0 tang shaft, setting ports L1 type, back inlet and front outlet (B), standard seals
BKP1-Q1-D-0.8-G0-L3=	顺时针转, 排量 0.8 cc/rev, Q1 前盖, G0 扁键轴伸, L3 安装油口, 标准油封
	clockwise rotation, 0.8 cc/rev, Q1 front cover, G0 tang shaft, setting ports L3 type, standard seals
BKP1-B0-D-0.8-T0-F0-N=	顺时针转, 排量 0.8 cc/rev, B0 前盖, T0 1:8锥形轴伸, F0 安装油口, 高压油封(N)
	clockwise rotation, 0.8 cc/rev, B0 front cover, 1:8 tapered shaft(T0), setting ports F0 type, high pressure seals(N)

BKP1B0




M6 螺纹深 12.
安装泵时，n.4 M8 螺钉扭矩设定为
 27 ± 3 Nm.
轴伸 M7 螺母扭矩设定为 8 Nm.

M6 thread depth 12.
To mount the pump, n.4 M8 screws,
with a torque wrench setting fixed
at 27 ± 3 Nm.
Shaft M7 nut, with a torque wrench
setting fixed at 8 Nm.

出油口
OUTLET

进油口
INLET

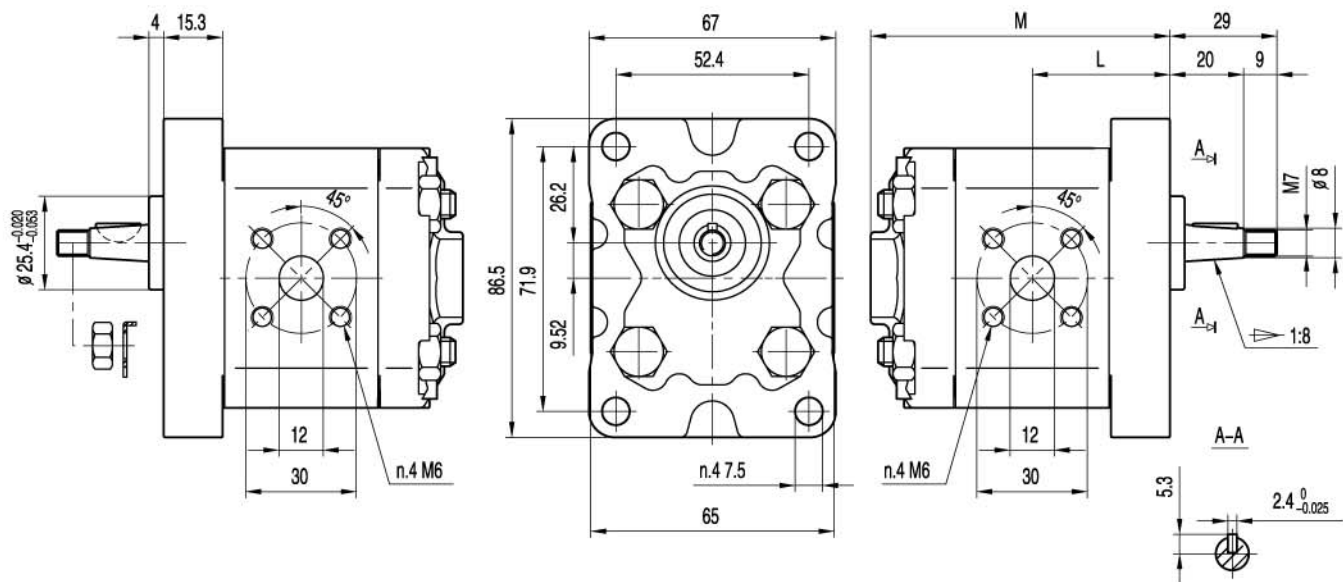

规格 Type	排量 Displacement	最大压力 Max pressure			最高转速 Max. speed	最低转速 Min. speed	尺寸 Dimensions	
		P1	P2	P3			M	L
	(cm ³ /rev)	bar	bar	bar	(r/min)	(r/min)	mm	mm
BKP1B0-D-0.8	0.8	230	250	270	6000	1000	73.5	32.8
BKP1B0-D-1.1	1.1	230	250	270	6000	1000	74	33
BKP1B0-D-1.3	1.3	230	250	270	6000	1000	75	33.5
BKP1B0-D-1.6	1.6	230	250	270	6000	1000	76	34
BKP1B0-D-1.8	1.8	230	250	270	6000	1000	77	34.5
BKP1B0-D-2.1	2.1	230	250	270	6000	1000	78	35
BKP1B0-D-2.7	2.7	230	250	270	6000	800	80	36
BKP1B0-D-3.2	3.2	210	230	250	5000	800	82	37
BKP1B0-D-3.7	3.7	210	230	250	4500	800	84	38
BKP1B0-D-4.2	4.2	210	230	250	4000	800	86	39
BKP1B0-D-4.8	4.8	190	210	230	3500	600	88	40
BKP1B0-D-5.8	5.8	190	210	230	3000	600	92	42
BKP1B0-D-7.0	7.0	160	180	200	2500	600	96	44
BKP1B0-D-8.0	8.0	160	180	200	2100	600	100	46