



Aluminium multiplier KM600 series


Three views:

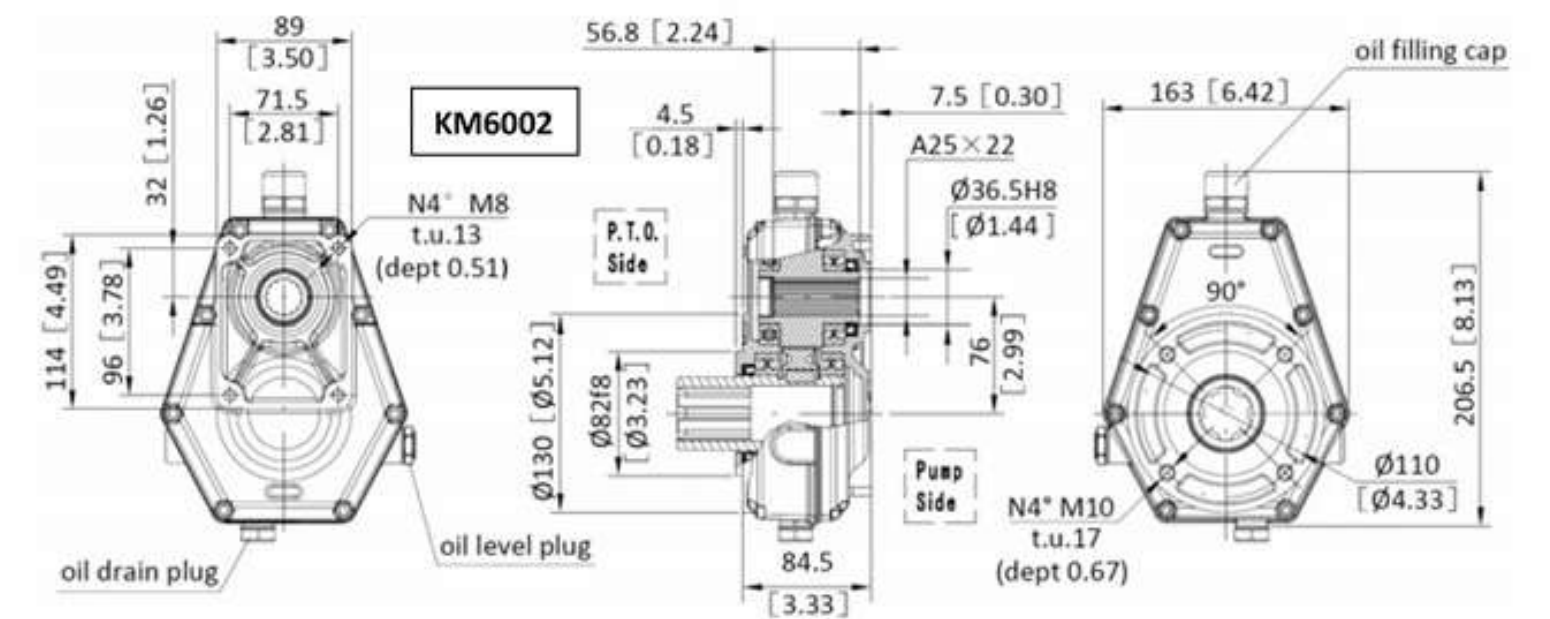


P.T.O.

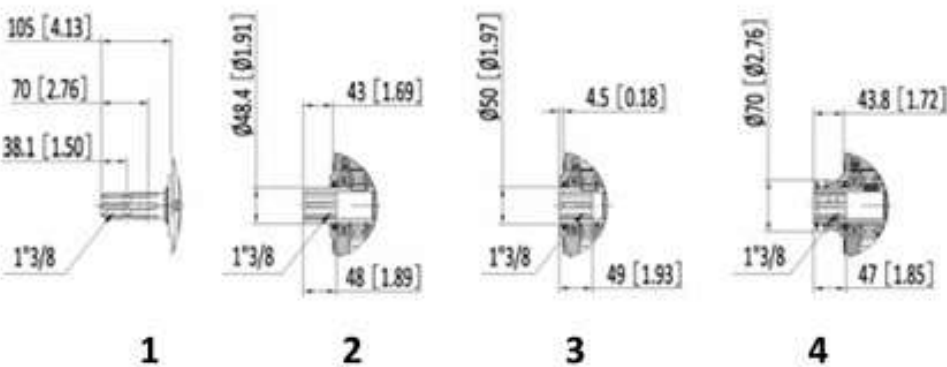

Mounting positions

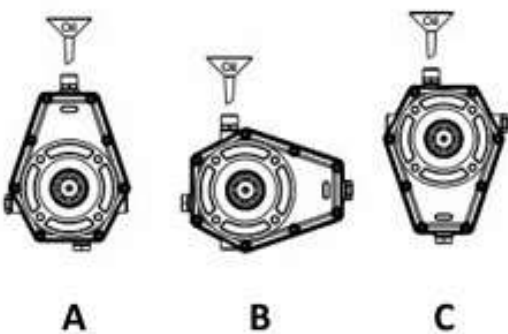

How to order:

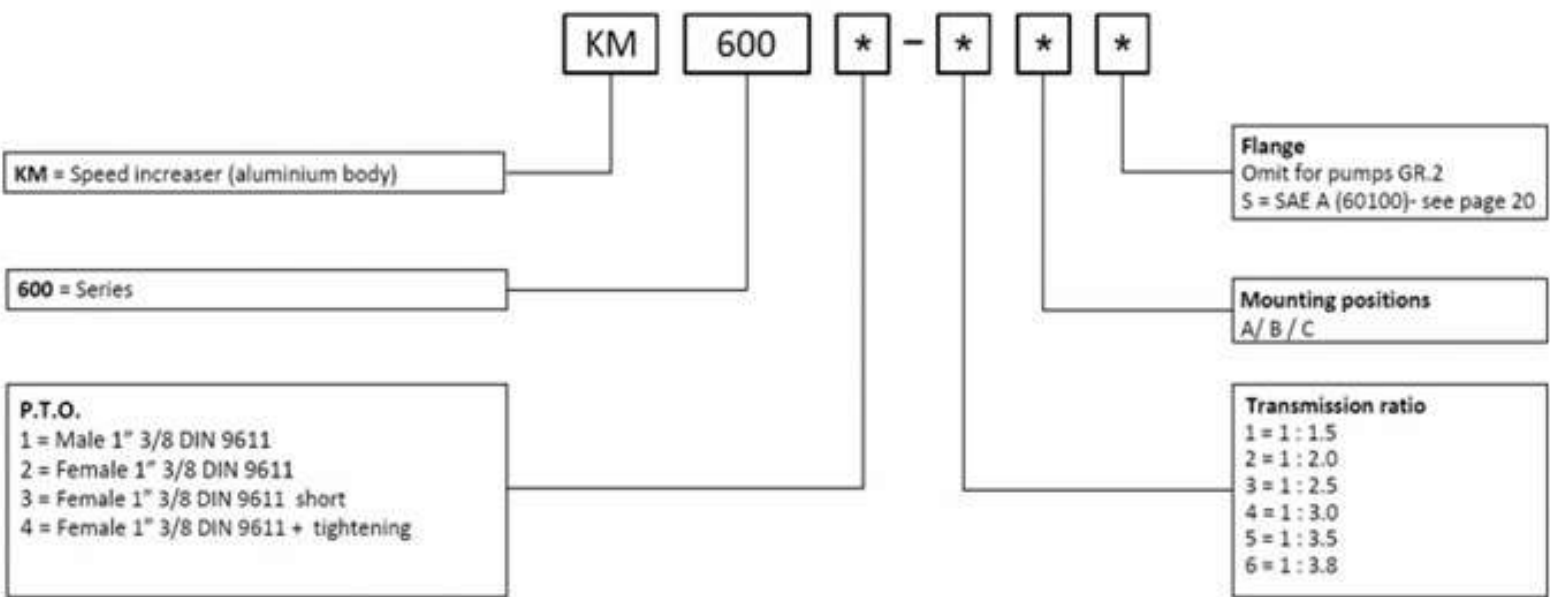

For example: KM6001-1AS

Aluminium multiplier KM600 series



KM6001



KM6002




KM6003



KM6004

Spare parts:

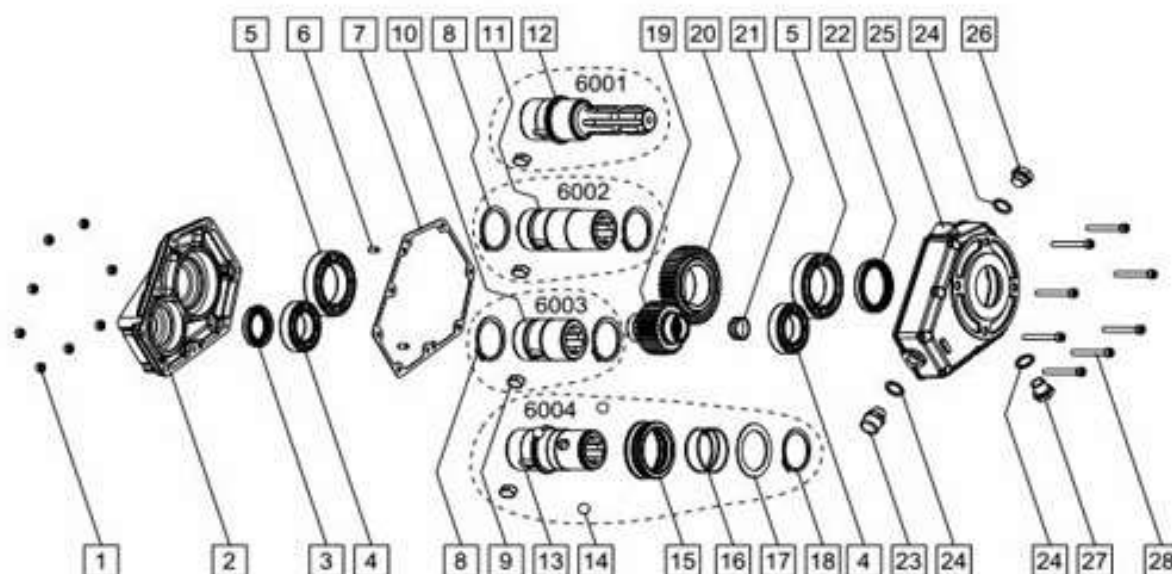

No.	Description	Quantity	No.	Description	Quantity
1	Nut M6	8	15	Spring ring	1
2	Cover	1	16	Spring	1
3	Sealing ring $\phi 35 \times 52 \times 7$	1	17	Ring	1
4	Bearing type 6007	2	18	Snap ring 48	1
5	Bearing type 6010	2	19	Pinion gear	1
6	Peg 6×12	2	20	Ring gear	1
7	Gasket	1	21	Cap DIN 470 $\phi 27$	1
8	Snap ring dia.50	2	22	Sealing ring $\phi 50 \times 65 \times 8$	1
9	Key 12×8	1	23	Oil filling cap 3/8"	1
10	Female 1 3/8" DIN 9611 short	1	24	Gasket	3
11	Female 1 3/8" DIN 9611	1	25	Housing	1
12	Male 1 3/8" DIN 9611	1	26	Oil drain plug 3/8"	1
13	Female 1 3/8" DIN 9611 + tightening	1	27	Oil level plug 3/8"	1
14	Ball	3	28	Socket capscREW M6 $\times$ 50	8

Technical sheet:

Input torque (Nm)	Output torque (Nm)	Input speed (r/min)	Transmission ratio	Output speed (r/min)	Power (Kw)	Weight (Kg)
178	119	540	1.5	810	10	5.8
152	76	540	2	1080	10	5.8
165	66	540	2.5	1350	10	5.8
180	55	540	3	1680	10	5.8
186	58	540	3.5	1836	10	5.8
159	42	540	3.8	2052	10	5.8